

# Geo S

Architectural Profile

L051D



Architectural rectangle cover profile manufactured from AL6063 type aluminium fitted with UV stabilised PMMA Opal diffuser.

Designed for ceiling surface/suspended mounted ambient/task light applications.

Recommended for LED types up to 50W/m output.

Supplied made to measure with all accessories and drivers as required.

Configured to suit most dimming protocols.



## Suggested LED Types:



5050-120-24

2835-120-24

2835-168-34

2835-180-36

2835-240-48

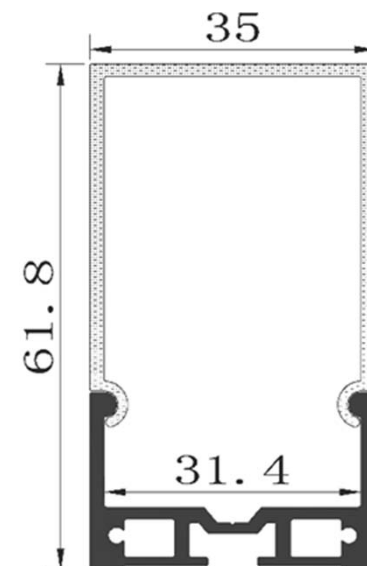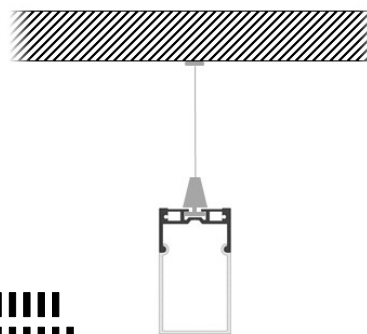

Some details on profiles may change without notice.

Please contact us for specification codes to match your selections.

Also Available in:

